

Tota-light

> > view the Omni-light



Compact, rugged & versatile, the broad throw Tota-light is a Lowel time honored favorite. It can be used with its umbrella or gel-frame & diffusion as a soft key, fill, or backlight. With its adjustable reflectors, it can be a smooth & even background light, or point it toward the ceiling to raise the ambient (base) light level of a room. Tota is also widely used for photographic copy work.

Multi-use, tungsten halogen source.


Adjustable reflecting doors can illuminate four walls evenly from a corner or compensate for light fall-off on vertical surfaces lit from above or below.

- Watts: 750 & 500 at 120v, 800 at 220/240v.
- 360° constant tension no-yoke tilting. Large, cool knobs.
- Closes compactly for storage & travel.
- Never operate with doors closed beyond notched safety stop.
- Protective front screen must always be used.



- Specs & Tech. data
- Lamp & Beam Data/ Performance
- Tota-light Models
- Tota Light Controls
- Uses these Stands & Mounts
- Tota-light Cables & Connectors
- Fits in these Cases
- Available in these Kits

Tota-light Specs & Tech. Data

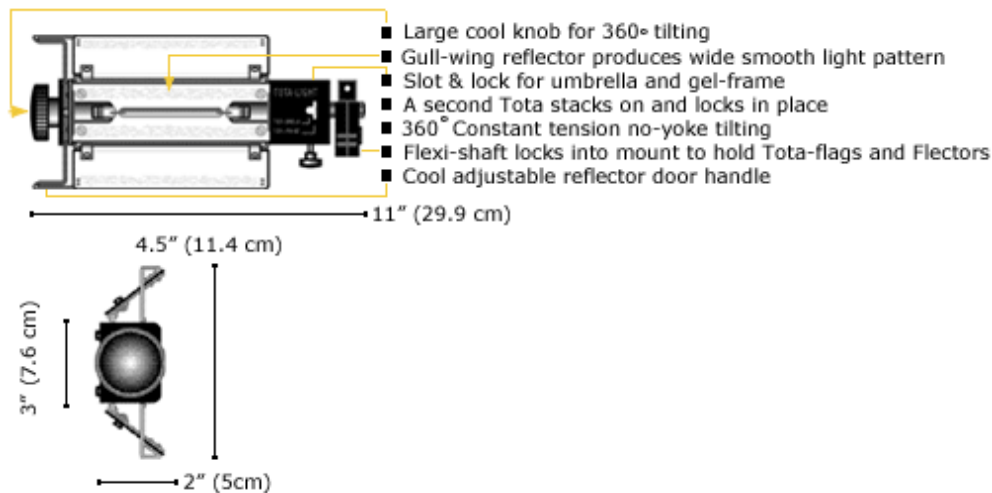

- Size closed:** 2" x 3" x 11" (5 x 7.6 x 27.9 cm) **Weight less cable:** 1.3 lbs. (595 g)
with 16' cable: 2.25 lbs (1.02 kg)
Max. wattage: 750w at 120v, 800w at 220/240v
Max. amperage: 6.25 at 120v
Beam control: door angle provides verticle beam control
Fits on: studs 5/8" (1.59 cm) or smaller
Materials: primarily aluminum alloy
Cable: 16' (4.88 m) #18/3 wire
Switch: in-line
U.S. Patent: 3852582